

USF Patents

February 2015

Variable screening

Mark Weston

Follow this and additional works at: https://digitalcommons.usf.edu/usf_patents

Recommended Citation

Weston, Mark, "Variable screening" (2015). *USF Patents*. 7.
https://digitalcommons.usf.edu/usf_patents/7

This Patent is brought to you for free and open access by Digital Commons @ University of South Florida. It has been accepted for inclusion in USF Patents by an authorized administrator of Digital Commons @ University of South Florida. For more information, please contact digitalcommons@usf.edu.

(12) **United States Patent**
Weston

(10) **Patent No.:** **US 8,960,259 B2**
(45) **Date of Patent:** **Feb. 24, 2015**

(54) **VARIABLE SCREENING**

(75) Inventor: **Mark Weston**, Bradenton, FL (US)

(73) Assignee: **University of South Florida**, Tampa, FL (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 463 days.

(21) Appl. No.: **13/231,271**

(22) Filed: **Sep. 13, 2011**

(65) **Prior Publication Data**

US 2012/0061029 A1 Mar. 15, 2012

Related U.S. Application Data

(60) Provisional application No. 61/382,531, filed on Sep. 14, 2010.

(51) **Int. Cl.**

E06B 9/56 (2006.01)
A47G 5/02 (2006.01)
A47H 23/00 (2006.01)
E04F 10/06 (2006.01)
E06B 9/08 (2006.01)
A47H 7/00 (2006.01)
E06B 9/06 (2006.01)
F24F 13/08 (2006.01)
F24F 11/00 (2006.01)

(52) **U.S. Cl.**

CPC **E06B 9/06** (2013.01); **F24F 13/082** (2013.01); **F24F 2011/0038** (2013.01)
USPC **160/290.1**; 160/237; 160/23.1; 160/405

(58) **Field of Classification Search**

USPC 160/127, 237, 405, 6; 428/136
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,065,785	A *	11/1962	Taber	160/81
4,105,724	A *	8/1978	Talbot	261/112.1
4,279,240	A *	7/1981	Artusy	126/579
5,967,788	A *	10/1999	Udoh	434/211
6,655,441	B2 *	12/2003	Wen et al.	160/168.1 P
2007/0184238	A1	8/2007	Hockaday et al.	
2007/0237923	A1 *	10/2007	Dorsy	428/136
2008/0163984	A1 *	7/2008	Lambey	160/2
2013/0139976	A1 *	6/2013	Carvalho	160/90

OTHER PUBLICATIONS

Lynn, Greg & Academy Group 1993, "Folding in Architecture", Architectural Design, No. 102, Academy Editions, London, pp. 24-31.

<http://www.nytimes.com/2008/04/06/magazine/06nouvel.html?pagewanted=all>.

<http://www.architectmagazine.com/energy-efficiency/visible-green.aspx>.

Drozdzowski, Z, 2009, "Adaptive Frilling as Case Exploration for Adaptivity in Architecture", Association for Computer Aided Design in Architecture Acadia, Chicago, pp. 105-109.

* cited by examiner

Primary Examiner — Katherine Mitchell


Assistant Examiner — Jeremy Ramsey



(74) *Attorney, Agent, or Firm* — Thomas I Horstemeyer, LLP

(57) **ABSTRACT**

In one embodiment, a variable screen includes a generally flat sheet having a front surface, a back surface, and a plurality of elongated slits that extend through the sheet from the front surface to the back surface, wherein the sheet includes a shape memory material that enables the slits to open into openings through which light and fluid can pass when a tensile force is applied to the sheet in a direction generally perpendicular to the slits and further enables the slits and openings to automatically when the tensile force is removed.

13 Claims, 16 Drawing Sheets

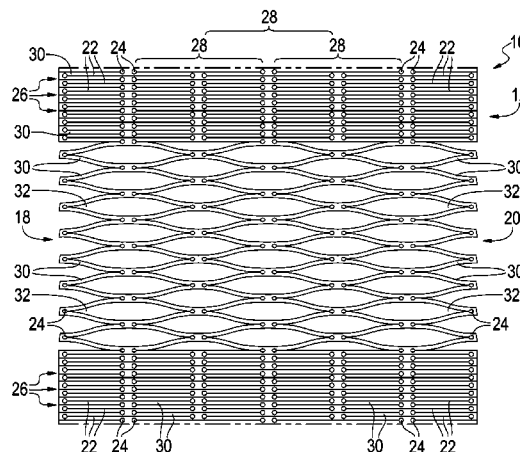

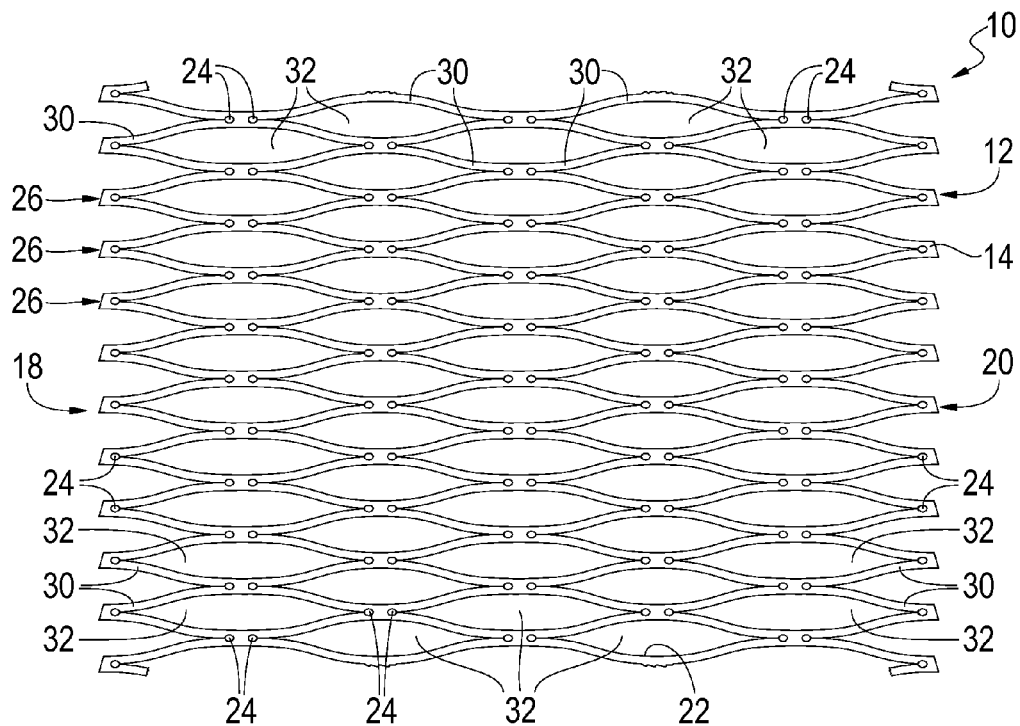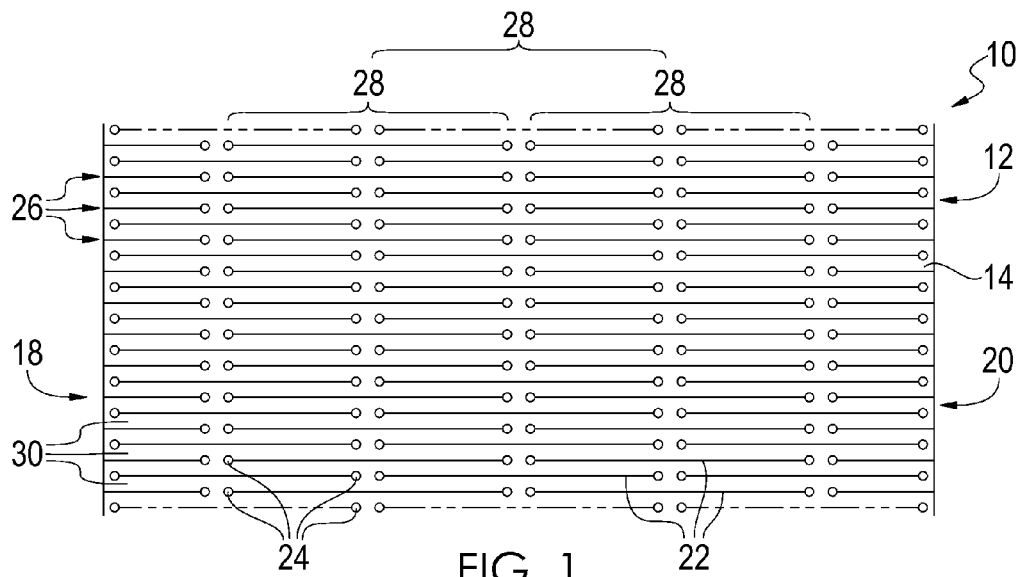

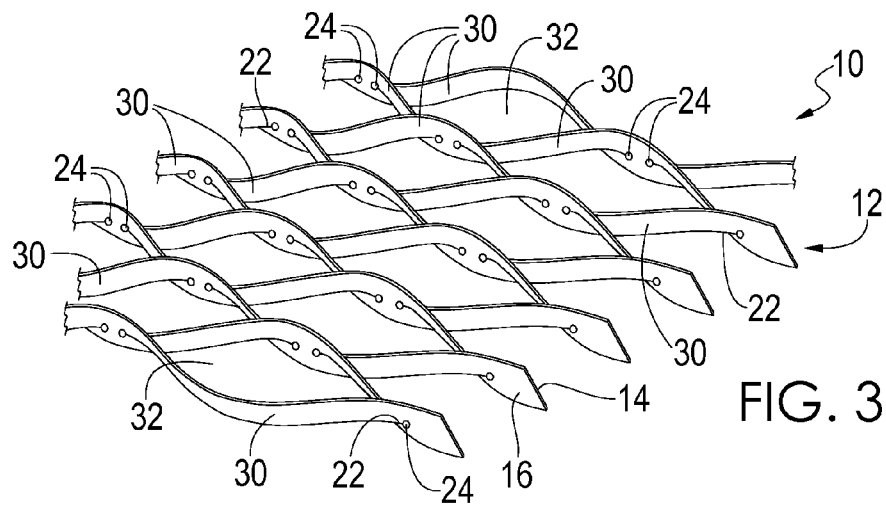


FIG. 3

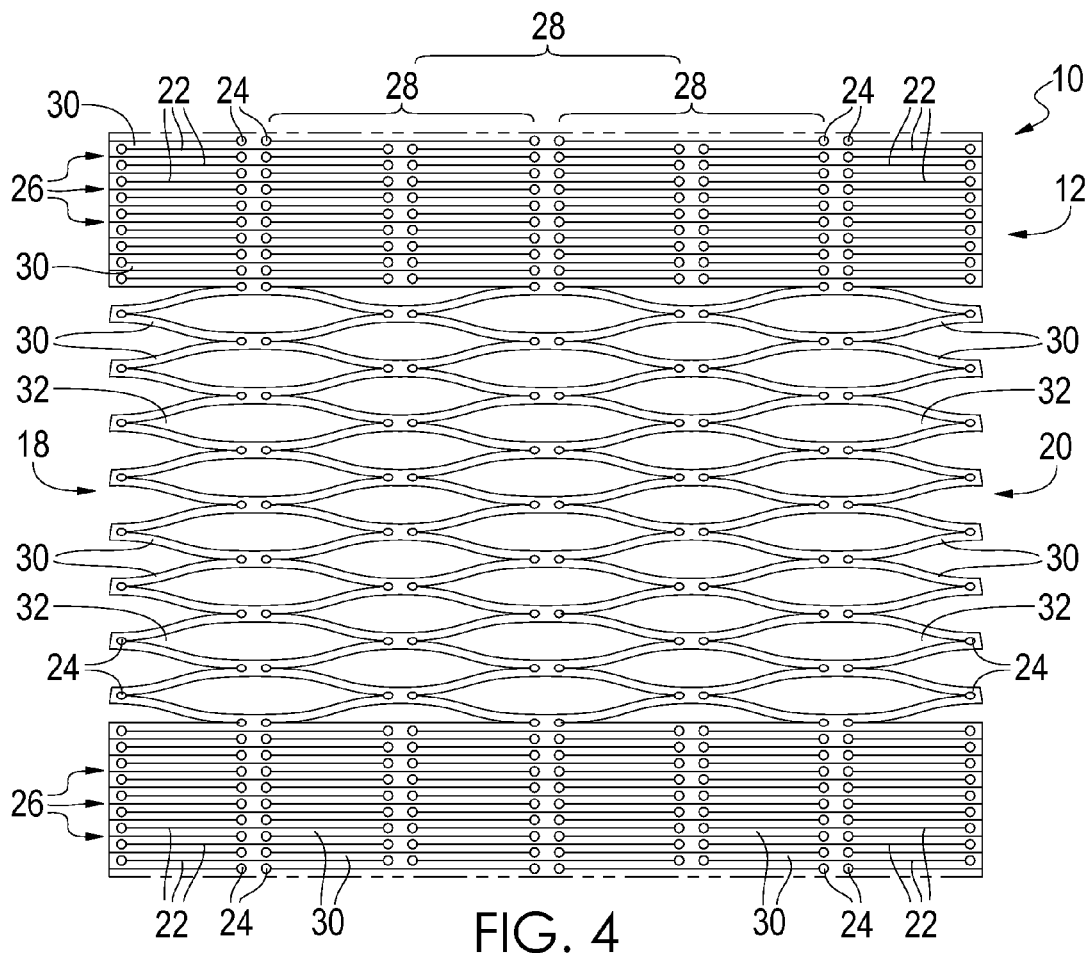


FIG. 4

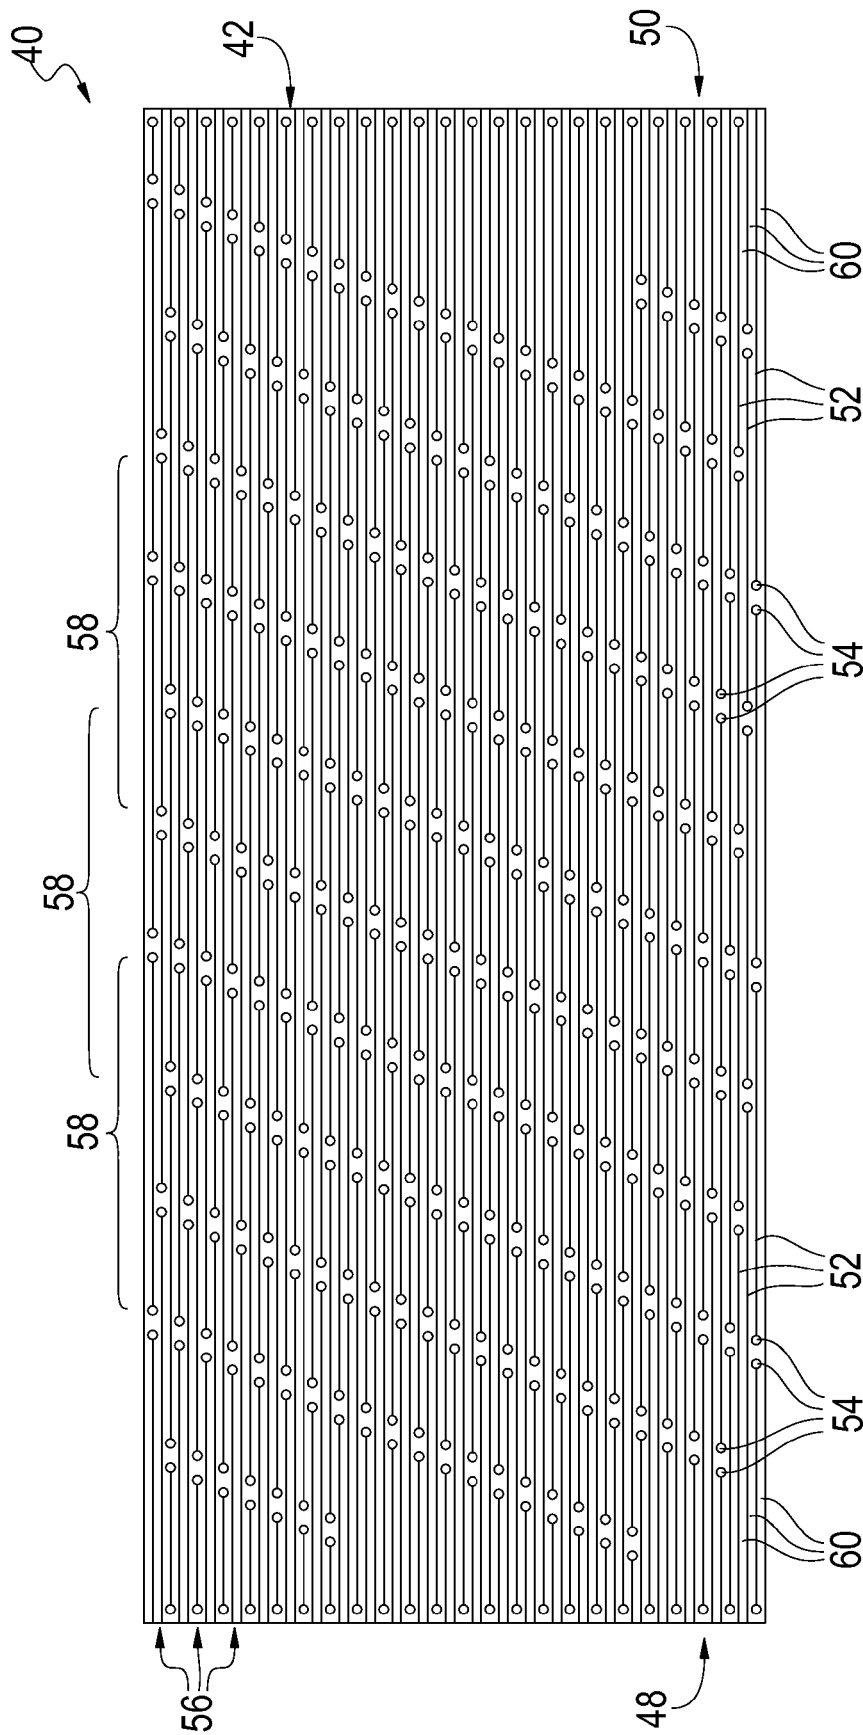


FIG. 5

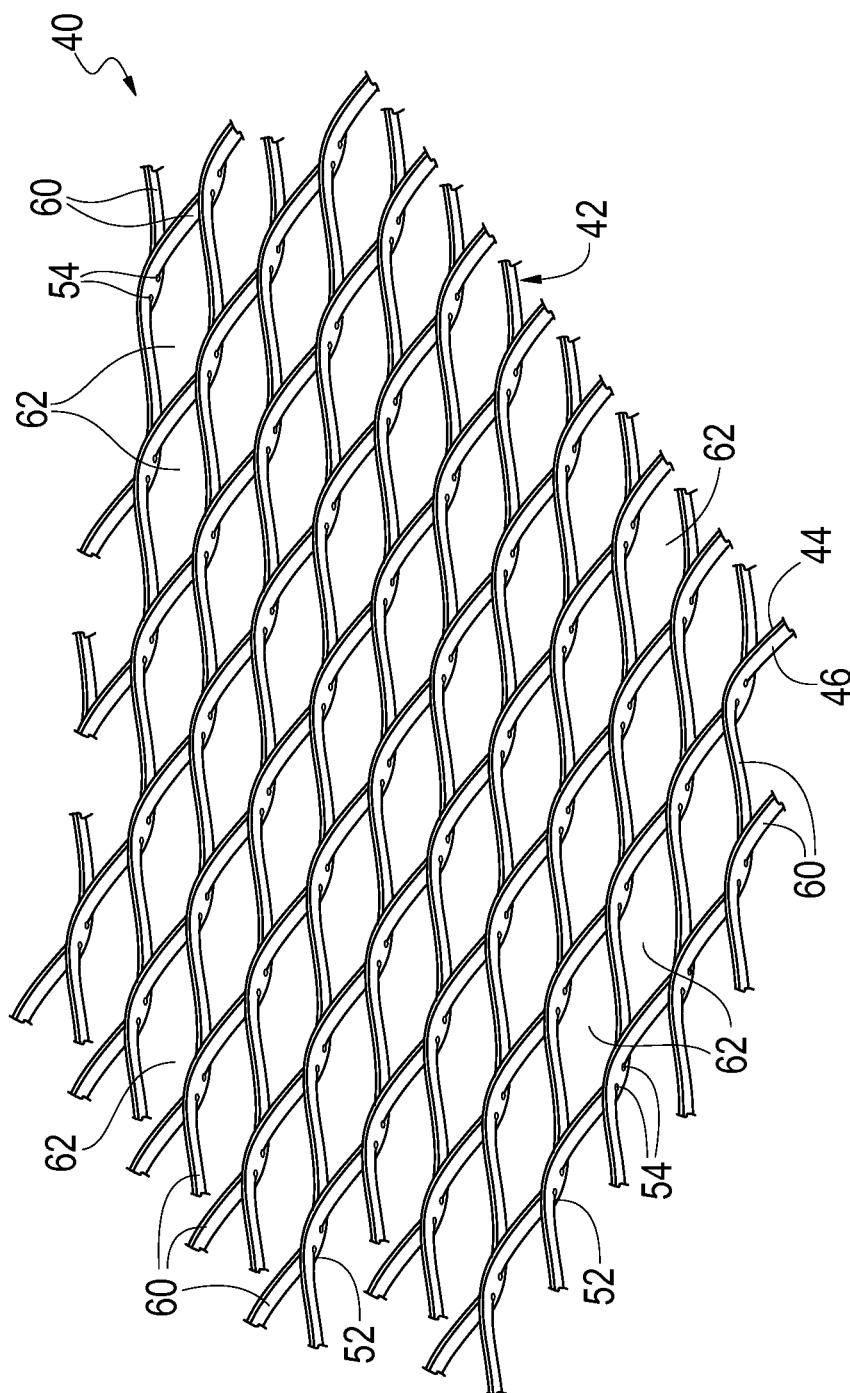
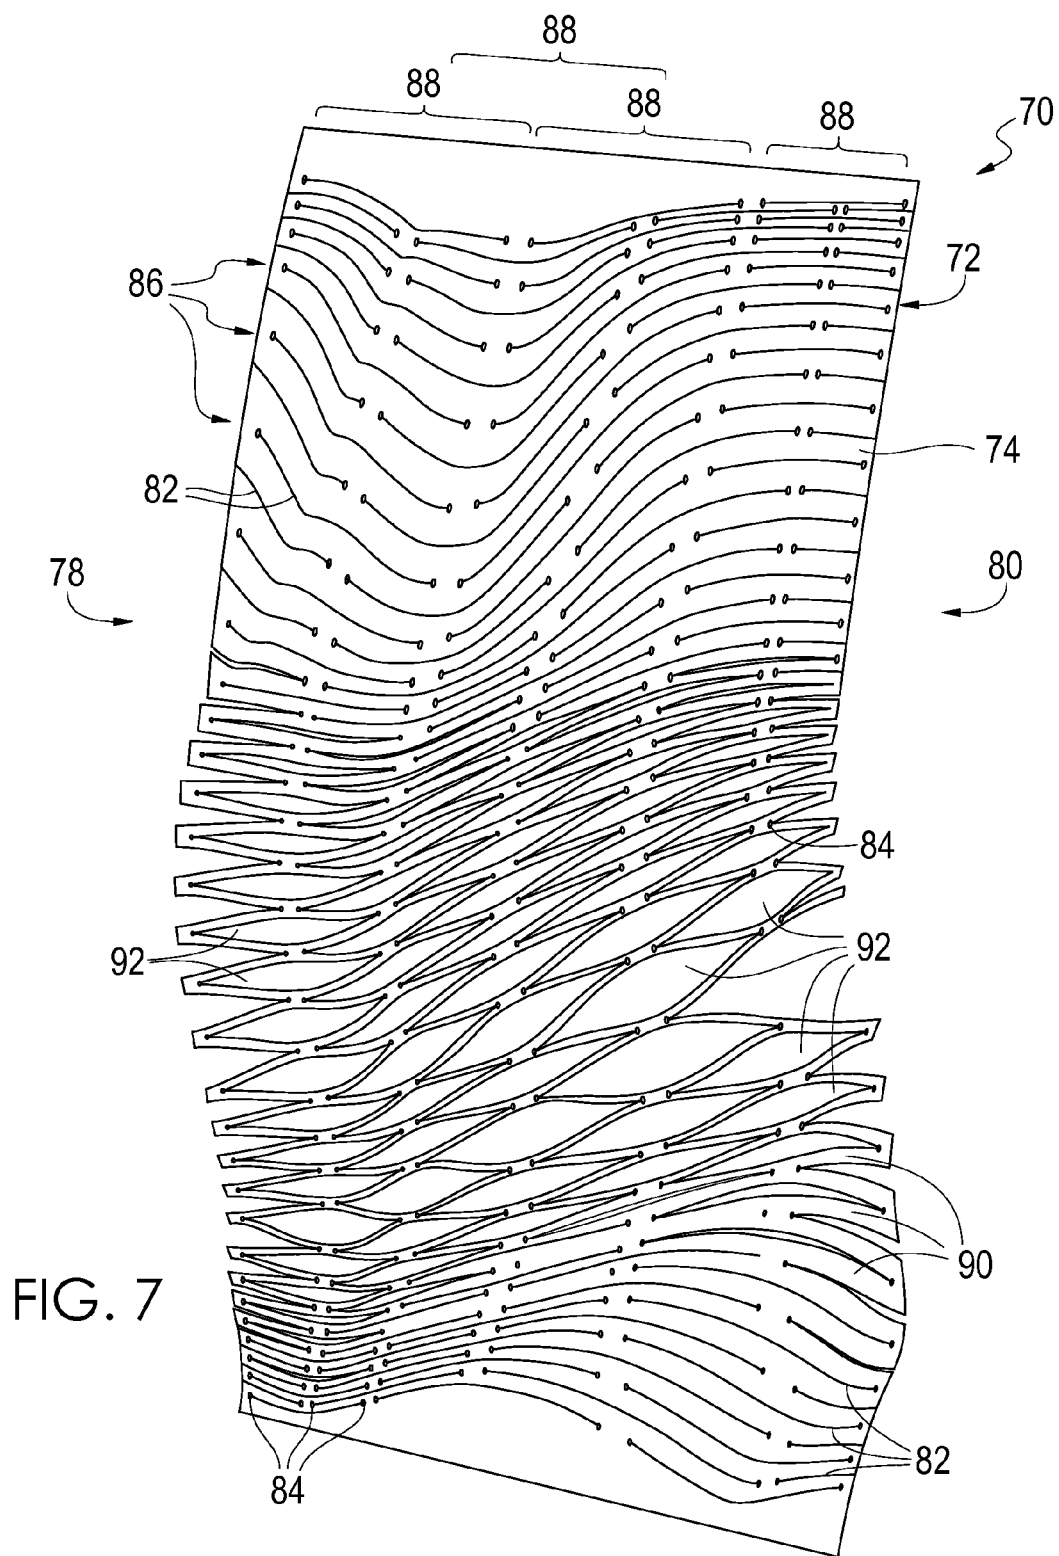


FIG. 6



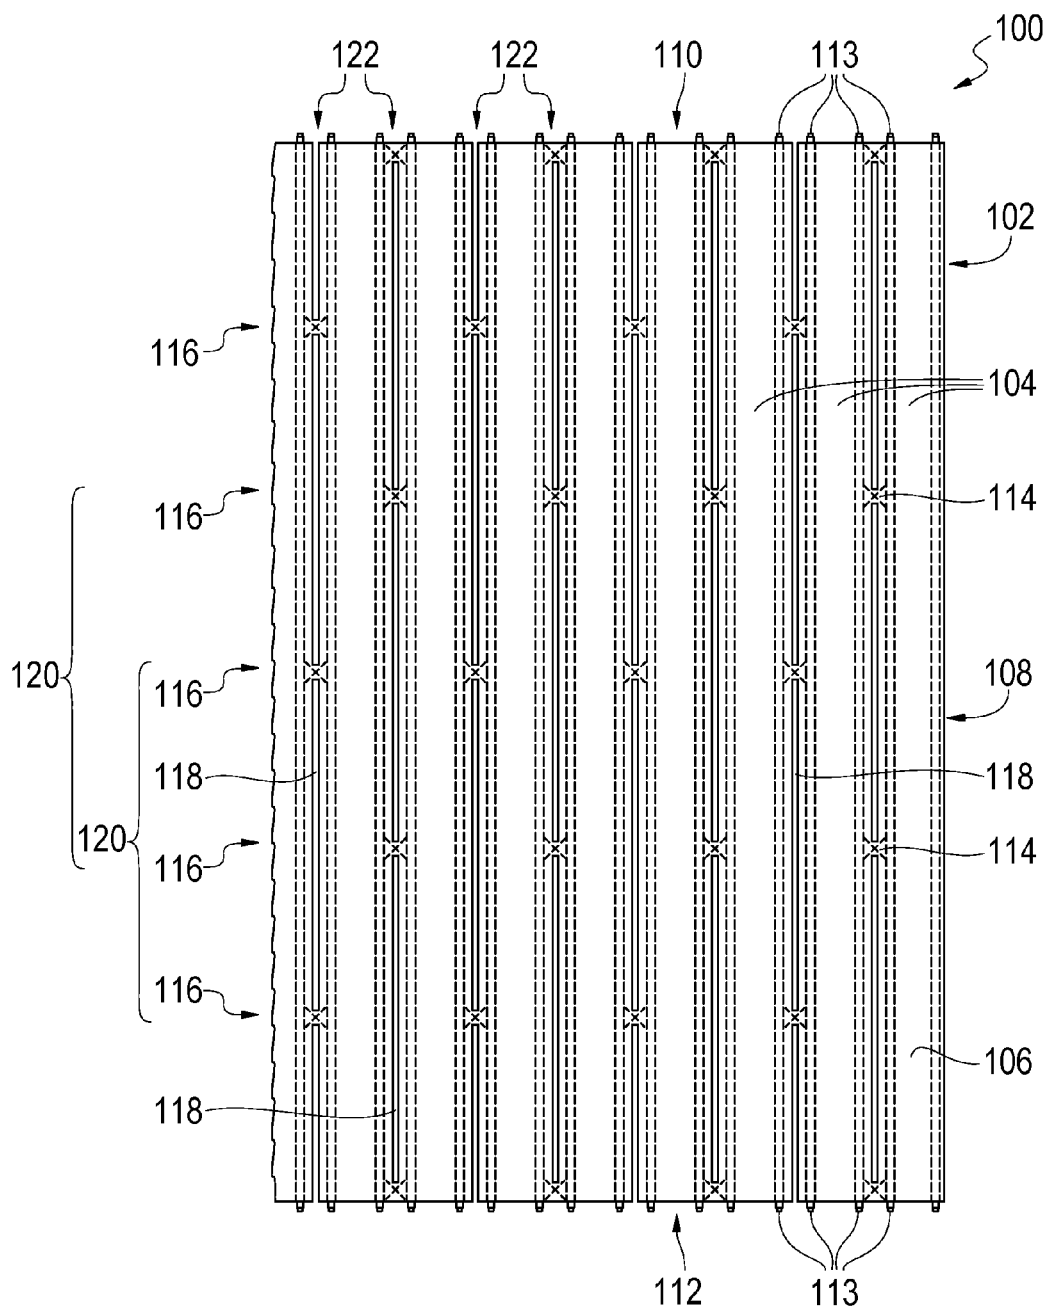
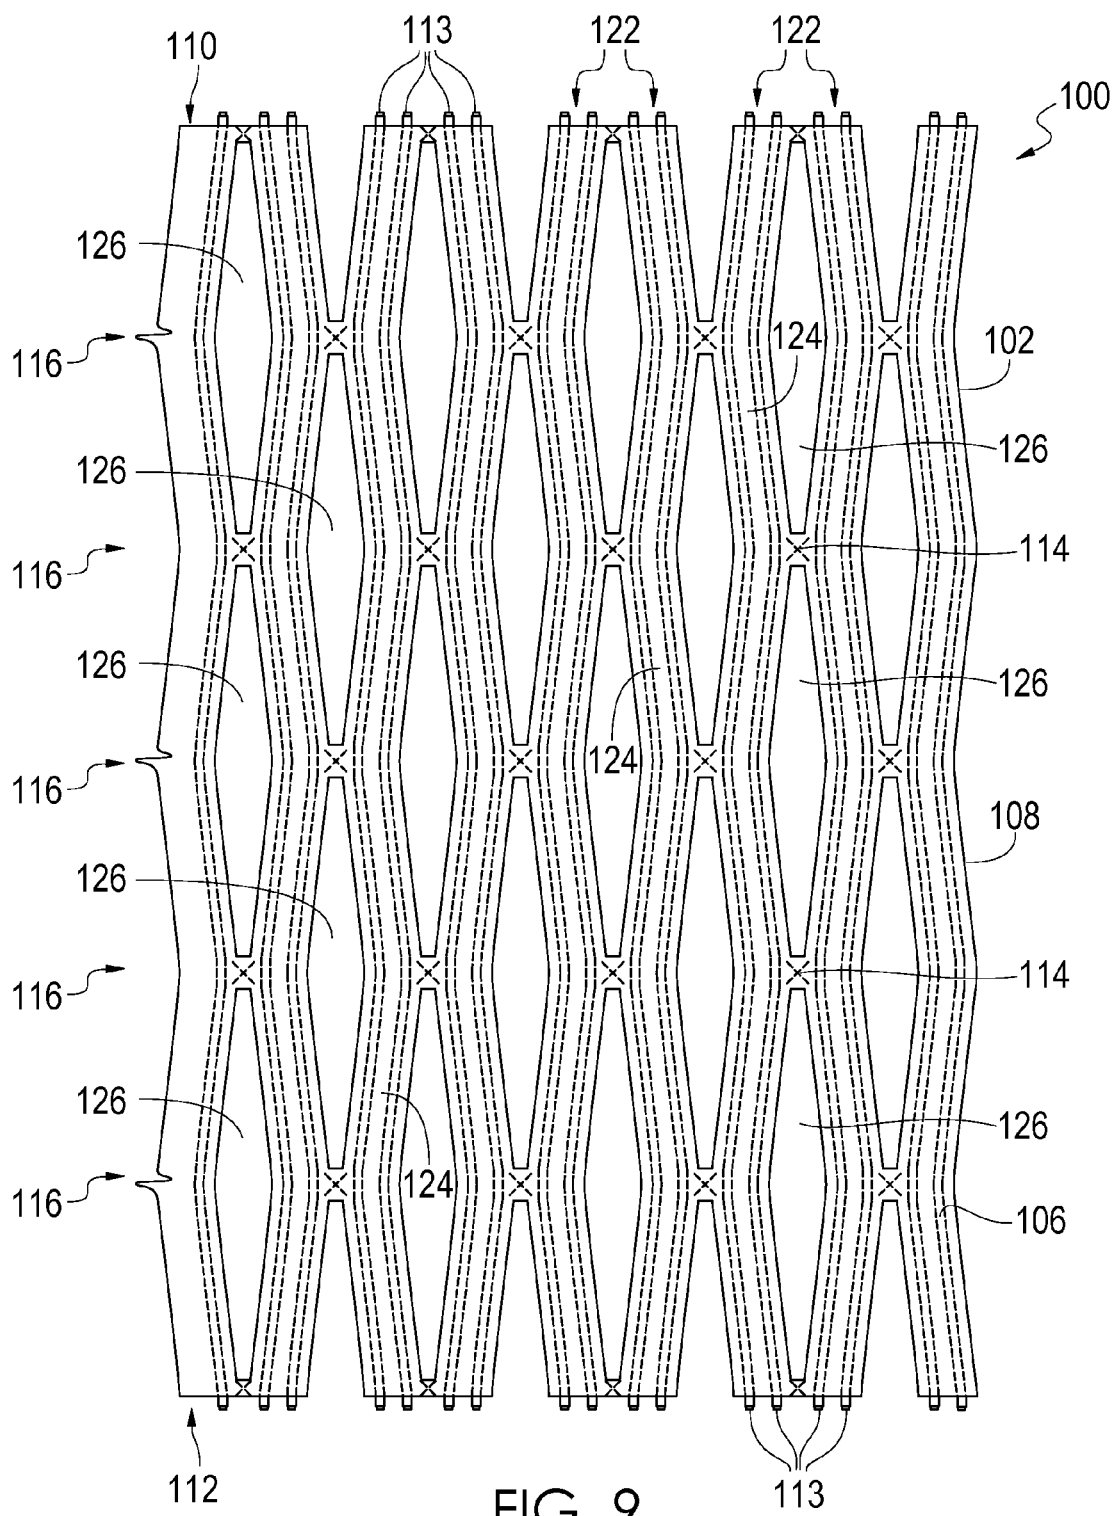
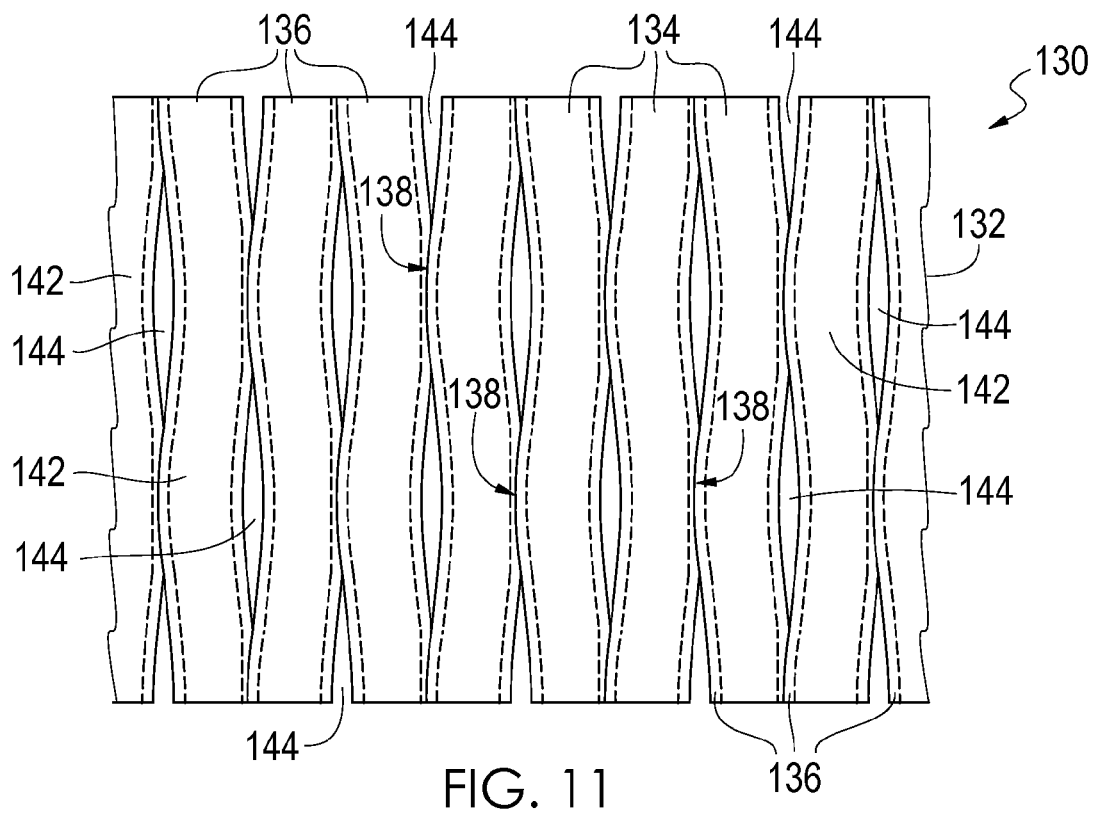
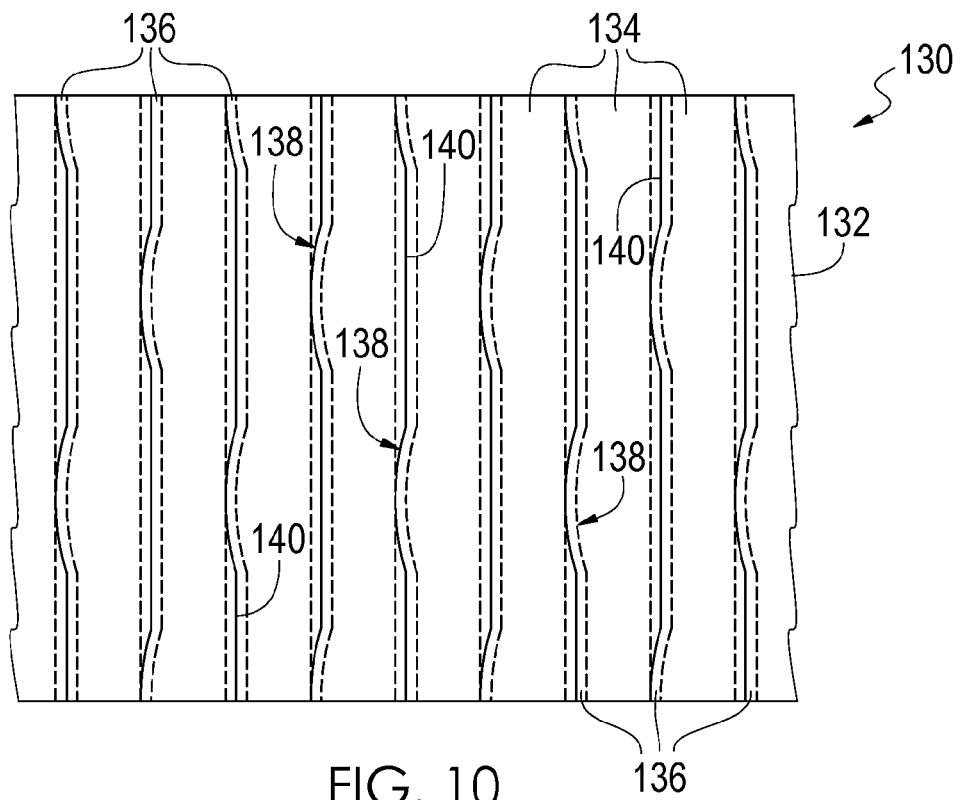


FIG. 8





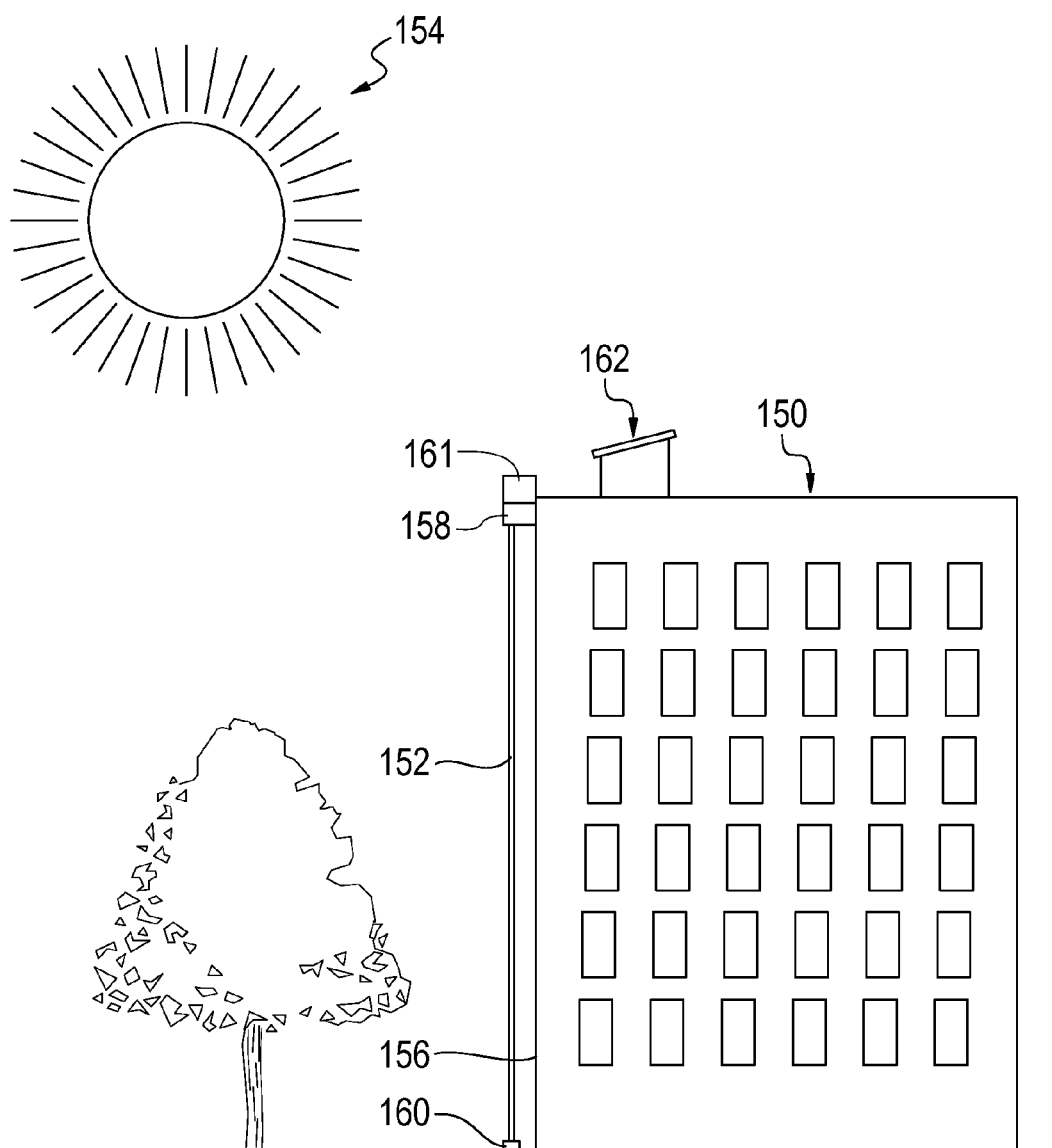


FIG. 12

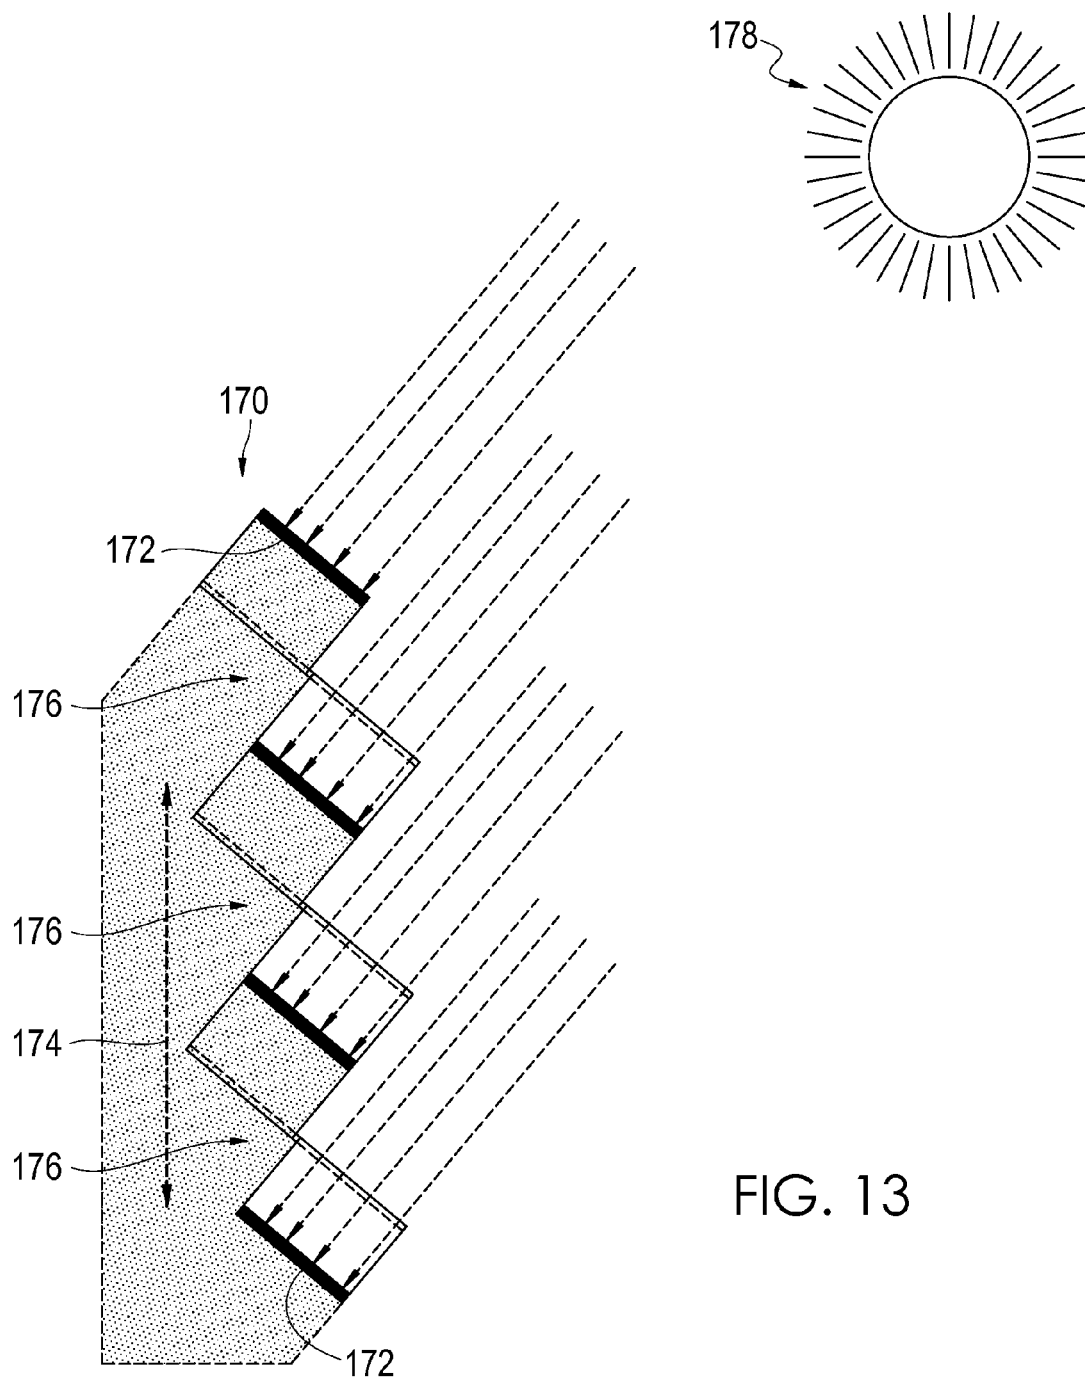


FIG. 13

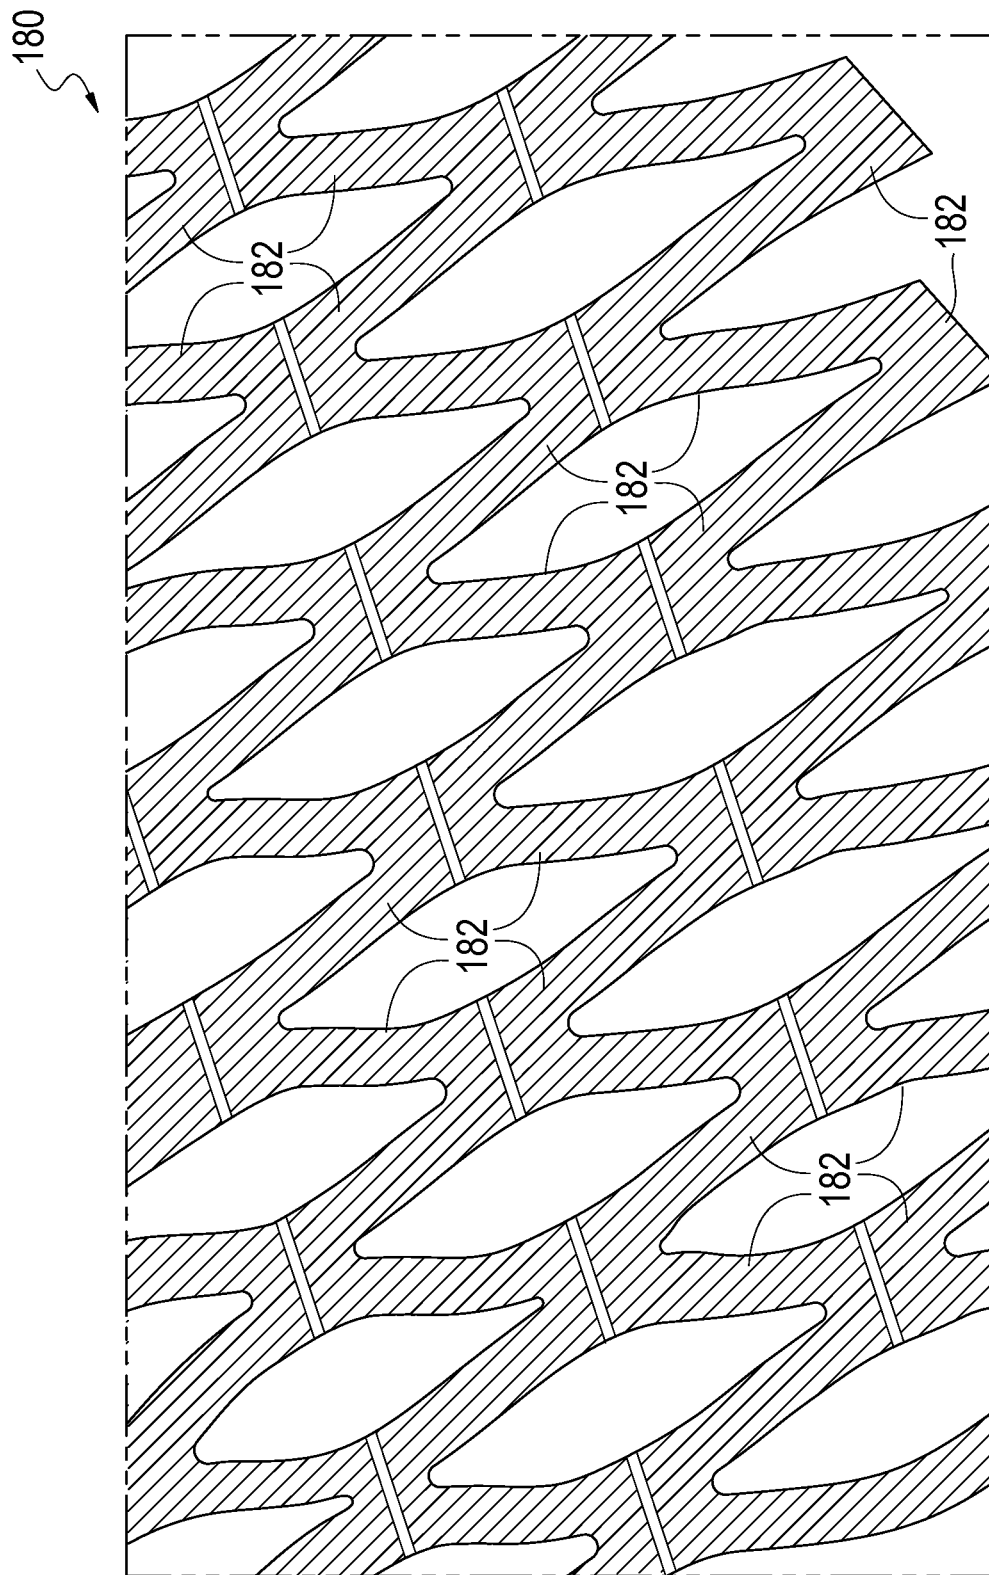


FIG. 14

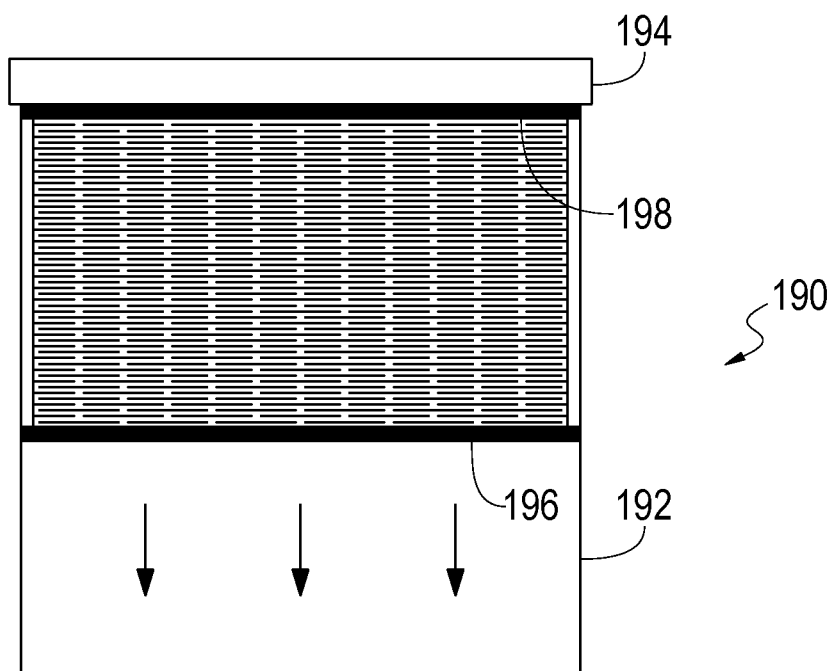


FIG. 15A

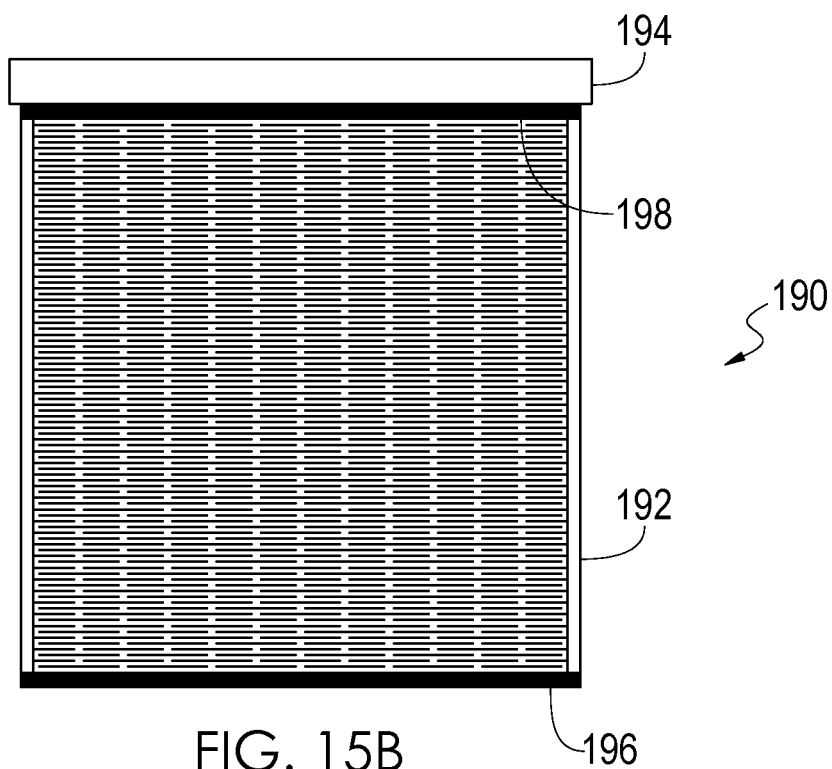
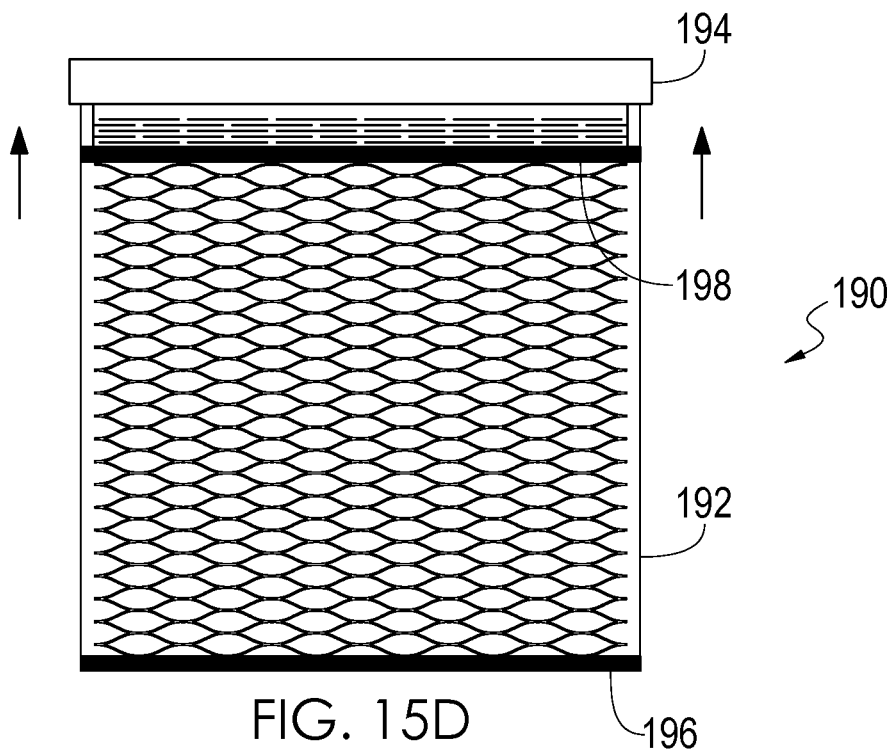
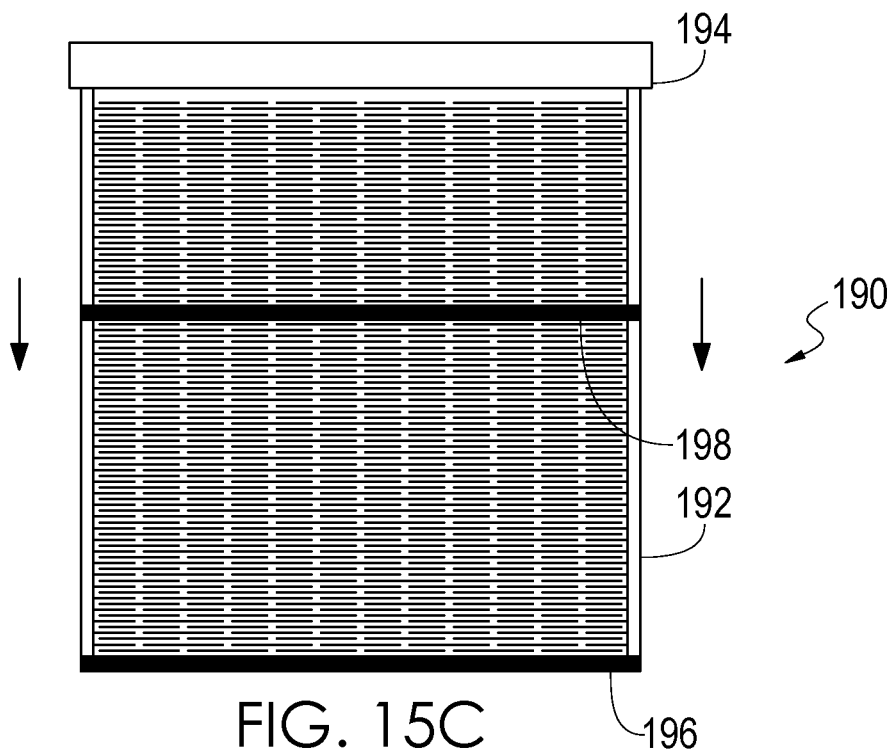


FIG. 15B



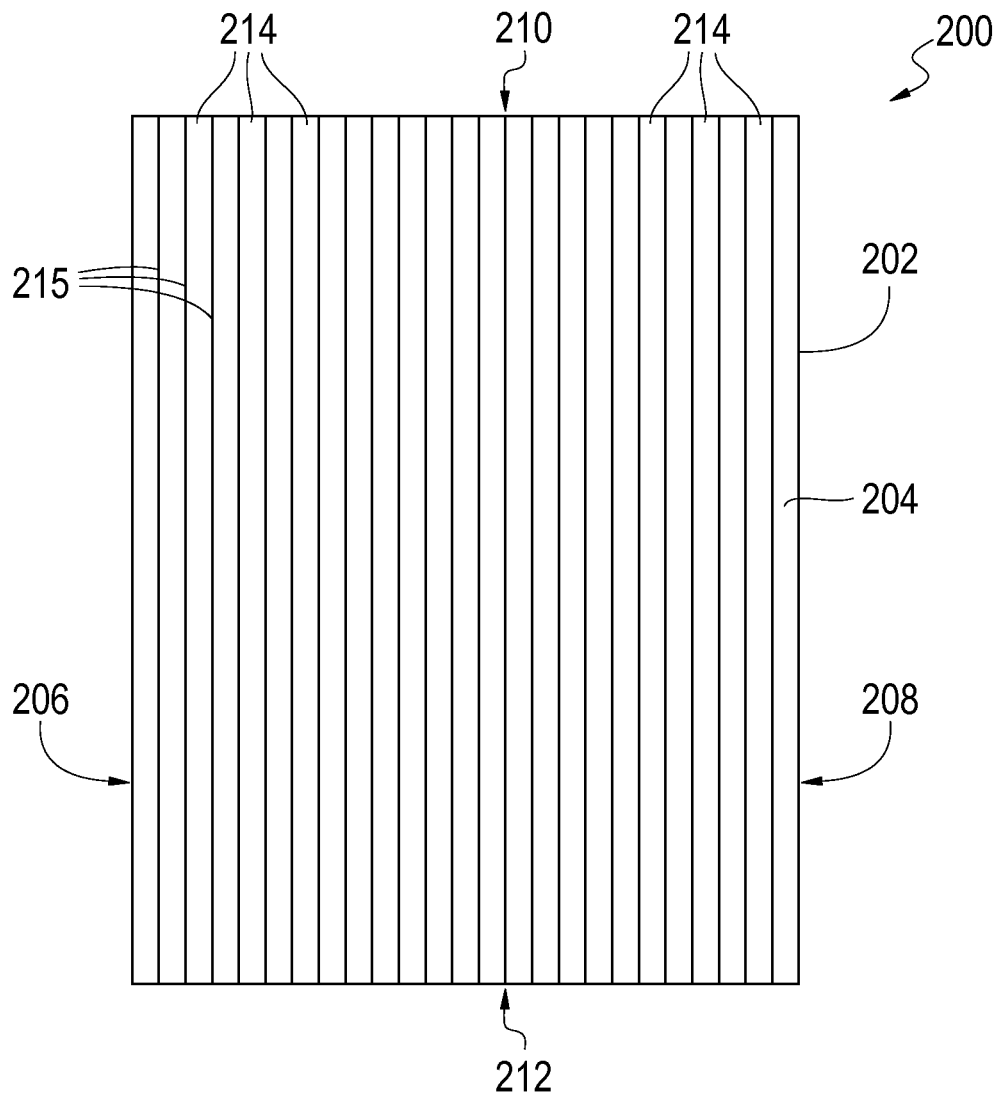


FIG. 16


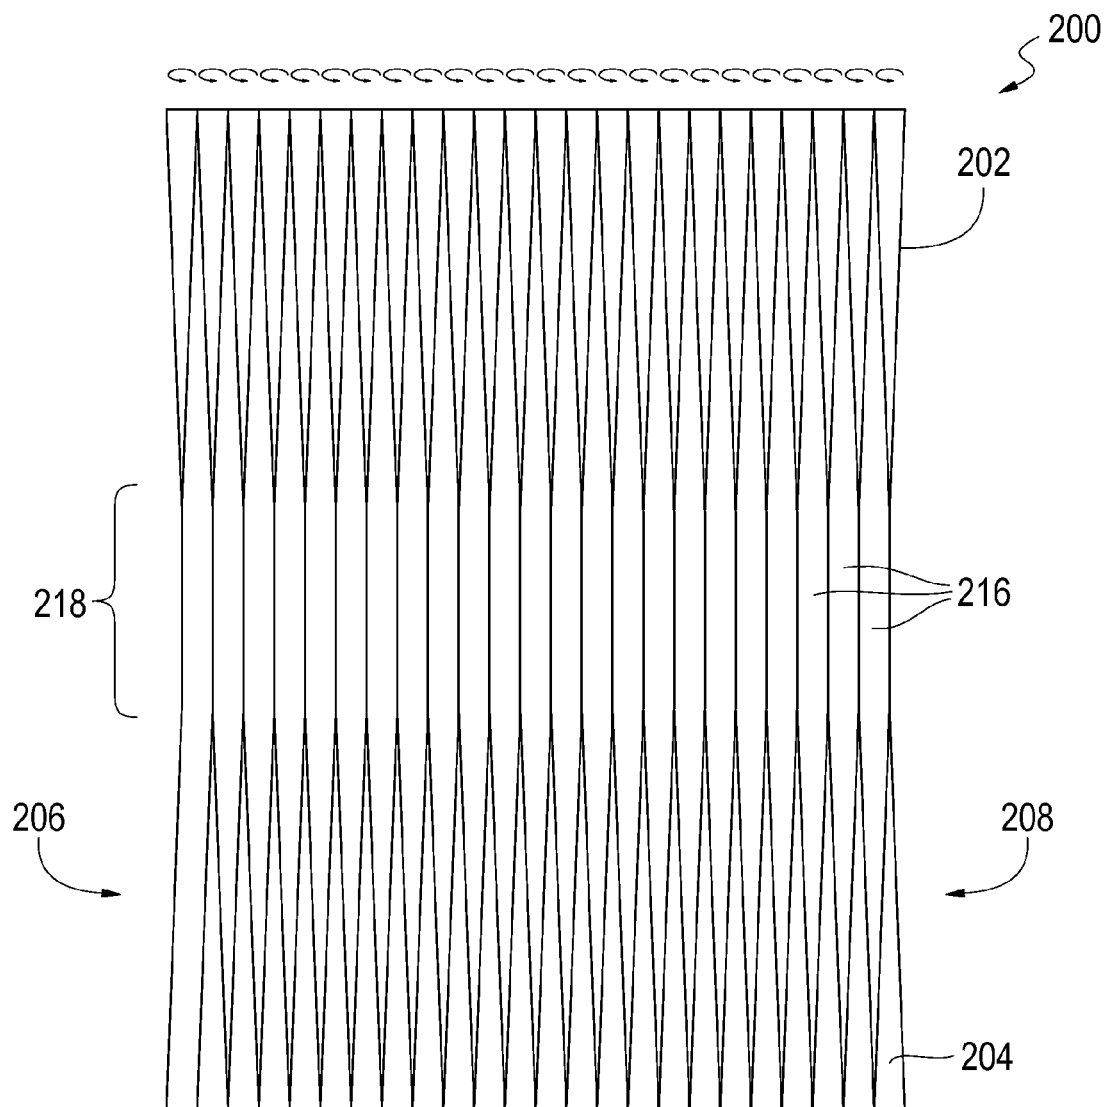


FIG. 17

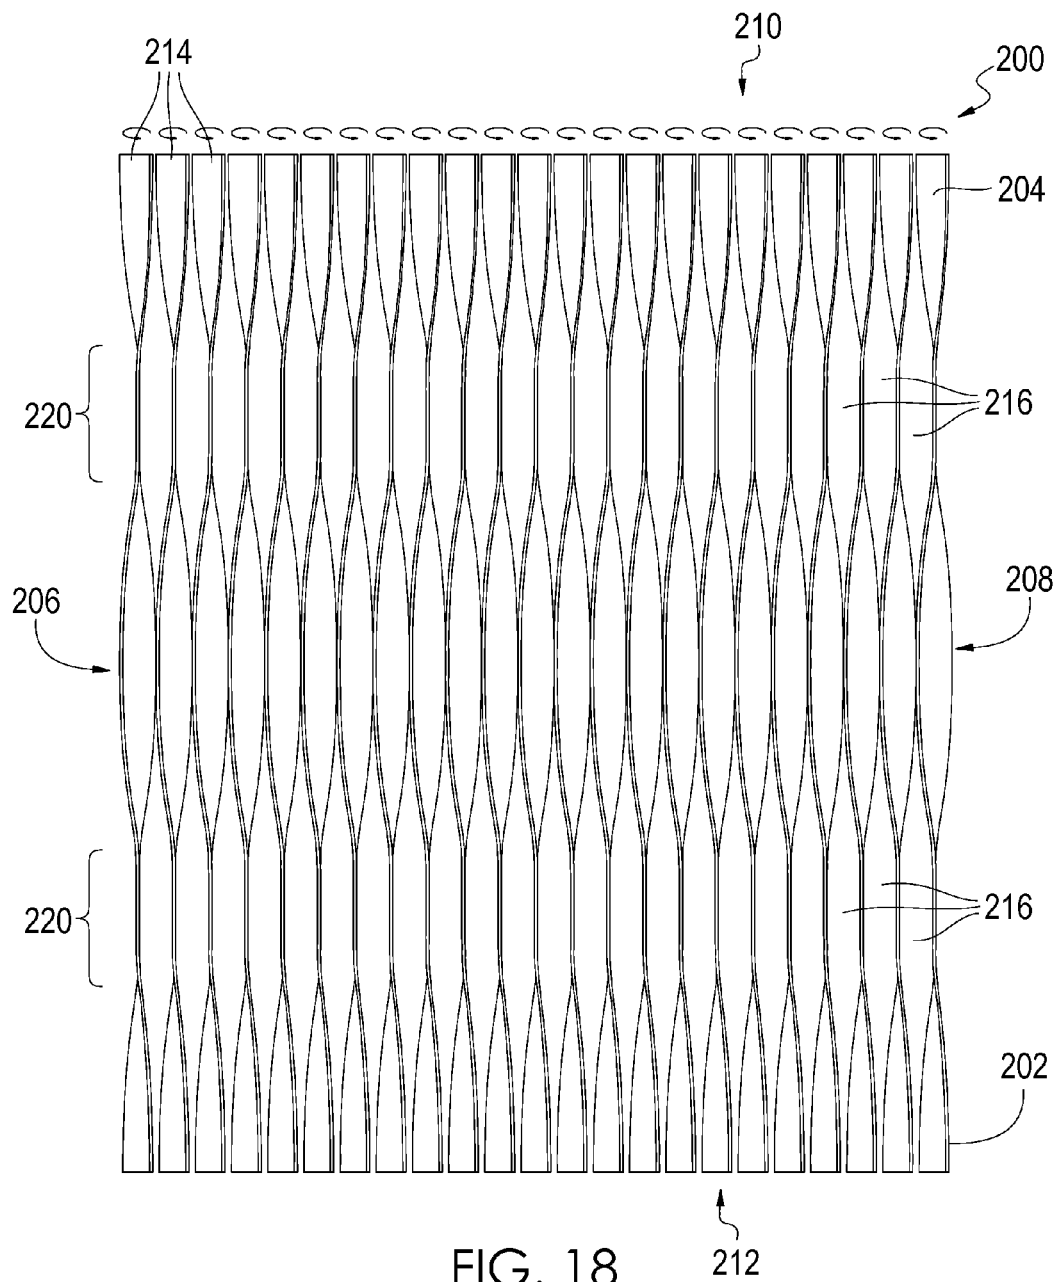

1

VARIABLE SCREENING

CROSS-REFERENCE TO RELATED
APPLICATION(S)

This application claims priority to U.S. Provisional Application Ser. No. 61/382,531, filed Sep. 14, 2010, which is hereby incorporated by reference herein in its entirety.

BACKGROUND

Solar shading is an essential component to good passive energy design for buildings. Sun angles and building orientation have been basic architectural considerations dating as far back as ancient Egypt, and are commonly seen in such vernacular building formations as shotgun and dog-trot houses, or wrap-around porches. Traditionally, solar design has come in the form of static shading devices applied to building openings, or in building forms which accommodate such strategies in their basic shape and orientation. New technologies, however, have created adaptive solar shading that responds to lighting conditions, time of day, and the presence of building occupants. Although active shading systems currently exist, they tend to rely on mechanical solutions to architectural problems. The use of material-based solutions remains substantially unexplored.

BRIEF DESCRIPTION OF THE DRAWINGS

The present disclosure may be better understood with reference to the following figures. Matching reference numerals designate corresponding parts throughout the figures, which are not necessarily drawn to scale.

FIG. 1 is a front view of a first embodiment of a variable screen shown in a closed orientation.

FIG. 2 is a front view of the variable screen of FIG. 1 shown in an open orientation.

FIG. 3 is a perspective view of the variable screen of FIG. 1 shown in an open orientation.

FIG. 4 is a front view of the variable screen of FIG. 1 shown in a partially open orientation.

FIG. 5 is a front view of a second embodiment of a variable screen shown in a closed orientation.

FIG. 6 is a perspective view of the variable screen of FIG. 5 shown in an open orientation.

FIG. 7 is a front view of a third embodiment of a variable screen shown in a partially open orientation.

FIG. 8 is a front view of a fourth embodiment of a variable screen shown in a closed orientation.

FIG. 9 is a front view of the variable screen of FIG. 8 shown in an open orientation.

FIG. 10 is a front view of a fifth embodiment of a variable screen shown in a closed orientation.

FIG. 11 is a front view of the variable screen of FIG. 10 shown in an open orientation.

FIG. 12 is a side view of a building equipped with a variable screen that provides shade to the building.

FIG. 13 is a cross-sectional view of a variable screen illustrating solar shading provided by the screen.

FIG. 14 is a front view of a sixth embodiment of a variable screen shown in an open orientation.

FIG. 15A-15D are views of a variable screen associated with a window, the screen being manipulated to provide solar shading.

FIG. 16 is a front view of a seventh embodiment of a variable screen shown in a closed orientation.

2

FIG. 17 is a front view of the variable screen of FIG. 16 shown in a first open orientation.

FIG. 18 is a front view of the variable screen of FIG. 16 shown in a second open orientation.

DETAILED DESCRIPTION

As described above, current adaptive shading systems are largely mechanical in nature and typically are not material-based solutions. Disclosed herein is variable screening that can be used to provide adaptive shading, among other benefits. Generally speaking, the disclosed variable screening uses the properties of flexible materials to form a screen that changes shape to create openings that vary in density according to the needs of the operator or application. This technology is useful for any application that requires a controlled and variable screen for the passage of light or fluids, such as air or water.

In one embodiment, slits are formed in a sheet of flat material. When the sheet is pulled along a direction that is generally perpendicular to length of the slits, openings are created that allow the passage of variable amounts of light and/or fluid depending on the tension applied. When the tension is released, however, the sheet automatically returns to its original shape, thereby limiting or preventing the passage of light and/or fluid.

In another embodiment, elongated strips of flexible material are aligned vertically or horizontally. The strips are then twisted along their longitudinal axes to enable the passage of light and/or fluid to variable degrees depending on the degree of twist that is applied. When untwisted, the strips automatically return to their initial flat shape, thereby limiting or preventing the passage of light and/or fluids.

The disclosed technology is useful for any application that requires a controlled and variable screen for the passage of light or fluid. In architectural applications it can be used as solar shading for enclosed or unenclosed buildings, an active photovoltaic device, a privacy screen, a light diffuser, an air diffuser, a wind screen, a protective barrier, or decoration. In some cases, optimal angles and opacities can be created to shade buildings and building openings to provide diffuse light while blocking direct light, or to provide visibility through the screen from selective angles. Such functionality is enabled by the use of flexible shape memory materials that can change shape when a force is applied to them but return to an original shape when the force is removed. The variable screens therefore can be stretched, bent, and twisted as needed to provide the desired result.

In the following disclosure, various embodiments are described. It is to be understood that those embodiments are example implementations of the disclosed inventions and that alternative embodiments are possible. All such embodiments are intended to fall within the scope of this disclosure.

FIGS. 1-4 illustrate a first embodiment of a variable screen 10. As is shown in those figures, the screen 10 comprises a generally flat sheet 12 of material that is defined at least in part by a first or front surface 14, a second or back surface 16, and opposed lateral edges 18 and 20. Not shown in FIGS. 1-4 are opposed top and bottom ends of the sheet 12. The material used to construct the flat sheet 12 is a shape memory material that can be deformed in one or more directions in response to an applied force, and return to its original shape when the force is removed. Such materials can include wood, metal, and polymer materials. In addition, the materials can be composite materials, such as carbon fiber or fiberglass. In some embodiments, the material can be a laminate material that comprises multiple layers of material, which can be the same

material or different types of material. The dimensions of the sheet 12, such as thickness, height, and width, can vary greatly depending upon the intended application. As is described below, the screen 10 can be used in small applications, such as use as a window shade, or large applications, such as use as a building shade or barrier. Therefore, the dimensions can range from microns to meters. This can be said for every screen embodiment described herein.

With particular reference to FIG. 1, which shows the variable screen 10 in its natural, closed orientation, the sheet 12 comprises multiple elongated linear slits 22 that extend through the sheet from its front surface 14 to its back surface 16. In the embodiment of FIGS. 1-4, the slits 22 are each generally parallel to each other and extend across the screen 10 in a lateral direction that is generally perpendicular with the lateral edges 18, 20 of the sheet 12. The slits 22 can be formed using any suitable cutting technique, including laser cutting. As is further shown in FIG. 1, each slit 22 can terminate in a circular opening 24 that acts as a stress relief that prevents unintended progression of the slits.

In the embodiment of FIGS. 1-4, the slits 22 can be said to be arranged in both lateral rows 26 and vertical columns 28 (in the orientation of FIG. 1) that are orthogonal to each other. Each slit 22 can be said to lie in a row 26 that extends across the sheet 12 in a lateral direction that is generally perpendicular with the lateral edges 18, 20 of the sheet, with each slit being separated from the next slit in the row by a small distance (relative to the length of the slits). Each slit 22 can also be said align with other slits within a column 28 that is generally parallel to the lateral edges 18, 20 of the sheet with each slit of the column being separated from the next slit in the column by a relatively small distance (relative to the length of the slits). As is shown in FIG. 1, portions of other slits contained within other columns 28 can sit between slits within a given column. The columns 28 of slits 22 therefore partially overlap each other across the width direction of the sheet 12 (in the orientation of FIG. 1) to form a staggered configuration apparent from the figure.

As can further be appreciated from FIG. 1, the formation of the slits 22 results in the creation of multiple slats 30 that are likewise arranged in both orthogonal rows and columns across the sheet 12. As is described below, those slats 30 can block light or fluids even when the variable screen 10 is in an open orientation.

Because the variable screen 10 is made of a shape memory material, it can be deformed and automatically return to its original shape. FIG. 2 shows the screen 10 in an open orientation that results when the sheet 12 is stretched along the vertical direction (in the orientation of FIG. 2) by a tensile force. The tensile force causes the slats 30 of the sheet 12 to deform and separate such that the slits 22 open to form openings 32 that are likewise arranged in both orthogonal rows and columns. The shape of the openings 32 depends upon the amount of tensile force that is applied to the sheet 12 and the degree to which the slats 30 are deformed. In some cases, however, the openings 32 assume a general "eye" shape characterized by a relatively large lateral width, a relatively small vertical height, a rounded center, and pointed lateral ends (in the orientation of FIG. 2).

As is shown in FIG. 3, the slats 30 do not only deform vertically. Instead, the slats 30 further rotate or twist about their longitudinal axes such that the largely two-dimensional sheet 12 adopts a more three-dimensional shape having an increased thickness dimension. As is described below, this twisting can provide for increased insolation and, if the sheet 12 is provided with photovoltaic devices, solar power generation. Once the tensile force is removed, the sheet 12 automati-

cally returns to its original closed orientation without the application of any other force to the sheet.

Although the variable screen 10 can be opened uniformly across its vertical length, it can, in some cases, be selectively opened, or not opened, along its length. FIG. 4 illustrates an example of this. In the case shown in FIG. 4, the screen 10 is open in a central region, but closed along top and bottom portions of the screen. Such operation can be achieved using various mechanical means, an example of which being described below in relation to FIGS. 15A-15D.

FIGS. 5 and 6 illustrate a second embodiment of a variable screen 40, which is a variation on the variable screen 10 shown in FIGS. 1-4. As is shown in FIGS. 5 and 6, the screen 40 also comprises a generally flat sheet 42 of material that is defined by a first or front surface 44, a second or back surface 46, and opposed lateral edges 48 and 50. The material used to construct the flat sheet 42 can be a shape memory material similar to that used to construct the variable screen 10.

With particular reference to FIG. 5, which shows the variable screen 40 in its natural, closed orientation, the sheet 42 comprises multiple linear slits 52 that extend through the sheet from its front surface 44 to its back surface 46, and that terminate in circular openings 54. As in the embodiment of FIGS. 1-4, the slits 52 can be said to be arranged both in lateral rows 56 and vertical columns 58 (in the orientation of FIG. 5). However, in the embodiment of FIGS. 5 and 6, the columns 58 are not generally parallel to the lateral edges 48, 50 of the sheet 42. Instead, the columns 58 extend diagonally across the sheet 42 so as to form an acute angle with the lateral edges 48, 50. Although one particular diagonal configuration is shown in FIG. 5, many others are possible. Therefore, a greater or smaller angle can be formed between the columns 58 of slits 52 and the lateral edges 48, 50.

As with the embodiment of FIGS. 1-4, the formation of the slits 52 results in the creation of multiple slats 60 that are likewise arranged in both rows and columns across the sheet 42. Because the variable screen 40 is made of a shape memory material, it can be deformed and return to its original shape. FIG. 6 illustrates the screen 40 in an open orientation that results when the sheet 42 is stretched along the vertical direction (in the orientation of FIG. 6) by a tensile force. The tensile force causes the slats 60 of the sheet 42 to deform and separate such that the slits 52 open to form openings 62 that are likewise arranged in both rows and columns, in this case lateral rows and diagonal columns. The shape of the openings 62 depends upon the amount of tensile force that is applied to the sheet 42 and the degree to which the slats 60 are deformed. Again, the openings 62 can assume a general "eye" shape characterized by a relatively large lateral width, a relatively small vertical height, a rounded center, and pointed lateral ends. As is shown in FIG. 6, the slats 60 do not only deform vertically. Instead, the slats 60 further twist or rotate about their longitudinal axes such that the largely two-dimensional sheet 42 adopts a more three-dimensional shape having an increased thickness dimension.

FIG. 7 illustrates a third embodiment of a variable screen 70, which is also a variation on the variable screen 10 shown in FIGS. 1-4. The screen 70 also comprises a generally flat sheet 72 of material that is defined by a first or front surface 74, a second or back surface (not visible), and opposed lateral edges 78 and 80. The material used to construct the flat sheet 72 can be a shape memory material similar to that used to construct the variable screen 10.

The variable screen 70 includes multiple slits 82 that extend through the sheet from its front surface 74 to its back surface, and that terminate in circular openings 84. In the embodiment of FIG. 7, however, the slits 82 are curved

5

instead of being linear. Despite this, the slits **82** can be arranged both in lateral rows **86** and vertical columns **88**.

As with the embodiment of FIGS. 1-4, the formation of the slits **82** results in the creation of multiple slats **90** that are likewise arranged in both rows and columns across the sheet **72**. In this case, the slats **90** can have different height dimensions and can be of varying height. Because the variable screen **70** is made of a shape memory material, it can be deformed and return to its original shape. FIG. 7 shows the screen **70** in a partially open orientation in which a center portion of the screen has been stretched along the vertical direction (in the orientation of FIG. 7) by a tensile force. The tensile force causes the slats **90** of the sheet **72** to deform and separate such that the slits **82** open to form openings **92** that are likewise arranged in both rows and columns. The shape of the openings **92** depends upon the amount of tensile force that is applied to the sheet **72** as well as the shape of the slits **82**. As with the other embodiments, the slats **90** twist about their longitudinal axes such that the largely two-dimensional sheet **72** adopts a more three-dimensional shape having an increased thickness dimension.

FIGS. 8 and 9 illustrate a fourth embodiment of a variable screen **100**, with FIG. 8 showing the natural, closed orientation, and FIG. 9 showing an open orientation. The variable screen **100** comprises a generally flat sheet **102** that includes multiple elongated strips **104** of material that are aligned so as to be parallel to each other along a vertical height direction of the screen (in the orientation of FIGS. 8 and 9). Unlike the previous embodiments, which employed shape memory material to construct the sheet, the strips **104** that form the sheet **102** are made of a flexible textile having no shape memory. The textile can comprise a woven (or otherwise arranged) fabric including synthetic and/or natural fibers. By way of example, the textile comprises a rip-stop nylon fabric. In some embodiments, the textile can include reinforcing fibers made of an aramid material, such as para-aramid (Kevlar®). Although the sheet **102** is composed of strips **104**, the sheet is still defined at least in part by a first or front surface **106**, a second or back surface (not visible), opposed lateral edges including edge **108**, a first or top edge **110**, and a second or bottom edge **112**. Like the other variable screens, the dimensions of the sheet **102**, such as height and width, can vary greatly depending upon the intended application.

Extending along opposed edges of each strip **104** along the longitudinal direction of the strips are elongated shape memory elements **113** that provide shape memory characteristics to the strips. In some embodiments, the shape memory elements **113** comprise rods or battens made from a material that can be deformed but return to its original shape. Example materials include wood, metal, and polymer materials. In addition, the materials can be composite materials, such as carbon fiber or fiberglass. In some embodiments the shape memory elements **113** are each provided in an elongated pocket that is formed (e.g., sewn) along the lateral edges of each strip **104**.

The strips **104** are connected together connection points **114**. In some embodiments, the connection points **114** comprise connection elements in the form of additional pieces of textile material, for example the same textile material used to form the strips **104**, that are sewn to the edges of the strips in predetermined locations. As is shown in FIGS. 8 and 9, the connection points **114** can be arranged in staggered rows **116** that extend laterally across the width of the sheet **102**. The provision of the connection points **114** results in the formation of elongated linear slits **118** that extend along the vertical direction of the sheet **102** (in the orientation of FIG. 8) generally parallel with the lateral edges of the sheet. Because the

6

locations of the connection points **114** are staggered, the slits **118** are likewise staggered. More specifically, the slits **118** can be said to be arranged in both lateral rows **120** and vertical columns **122** (in the orientation of FIG. 1), with the rows of slits **118** overlapping each other across the sheet **102** to form the staggered configuration apparent from in the figure. The formation of the slits **118** results in the creation of multiple slats **124** that are likewise arranged in both orthogonal rows and columns across the sheet **102** (see FIG. 9).

Because the variable screen **100** includes the shape memory elements **113**, the screen can be deformed and automatically return to its original shape. FIG. 9 shows the screen **100** in an open orientation that results when the sheet **102** is stretched along the lateral direction (in the orientation of FIG. 9) by a tensile force. The tensile force causes the slats **124** of the sheet **102** to deform and separate such that the slits **118** open to form openings **126** that are likewise arranged in both orthogonal rows and columns. The shape of the openings **126** depends upon the amount of tensile force that is applied to the sheet **102** and the degree to which the slats **124** are deformed. In some cases, however, the openings **126** assume a general "diamond" shape characterized by a relatively large vertical height, a relatively small lateral width, and pointed top and bottom ends (in the orientation of FIG. 9). As with the other embodiments, once the tensile force is removed, the sheet **102** automatically returns to its original closed orientation without the application of any other force to the sheet.

FIGS. 10 and 11 illustrate a fifth embodiment of a variable screen **130** that is similar in several respects to the fourth embodiment of FIGS. 8 and 9. Therefore, the variable screen **130** comprises a generally flat sheet **132** comprised by multiple elongated strips **134** of flexible textile material that are aligned so as to be parallel to each other along the vertical direction (in the orientation of FIGS. 10 and 11). Provided along the edges of each strip **134** is a shape memory element **136** that provides shape memory characteristics to the strips. In the embodiment of FIGS. 10 and 11, however, the strips **134** are connected together at various connection points **138**. In some embodiments, the strips **134** are sewn or glued together at the connection points **138**. As with the embodiment of FIGS. 8 and 9, the connection points **138** form staggered elongated linear slits **140** that extend along the vertical direction of the sheet (in the orientation of FIGS. 10 and 11) generally parallel with the lateral edges of the sheet **102**. The formation of the slits **140** results in the creation of multiple slats **142** that are likewise arranged in both orthogonal rows and columns across the sheet **102** (see FIG. 11).

Because the variable screen **130** includes the shape memory elements **136**, the screen can be deformed and return to its original shape. FIG. 11 shows the screen **130** in an open orientation that results when the sheet **132** is stretched along the lateral direction (in the orientation of FIG. 11) by a tensile force. The tensile force causes the slats **142** of the sheet **132** to deform and separate such that the slits **140** open to form openings **144** that are likewise arranged in both orthogonal rows and columns.

FIG. 12 illustrates an example large-scale application for a variable screen of the type described above. In FIG. 12, a building **150** is shaded by a variable screen **152** that is positioned between the sun **154** and a front side **156** of the building. The screen **152** is suspended by a housing **158** and is secured to a base member **160** that is provided on the ground. Associated with the housing **158** is a motor **161** that can be used to roll up at least a portion of the screen **152** within the housing **158**. Because the screen **152** is secured to the base member **160**, rolling up the screen within the housing **158**

applies tension to the screen and causes it to open in the manner described above in relation to FIGS. 1-11.

In some embodiments, the screen **152** can be automatically opened or closed depending upon environmental conditions. For example, the angle or intensity of the sun can be detected with a light sensor **162** and the orientation of the screen **152** can be automatically controlled in response to the detected angle or intensity by automatically controlling the motor **161**. In other embodiments, the screen **152** can be controlled relative to the global coordinates of the building **150**, the day of the year, and/or the time of day. In still further embodiments, operation of the motor **161** can be computer programmed relative to user preferences. If the screen **152** were intended for shielding the building **150** from wind instead of light, the orientation of the screen could instead be controlled in relation to sensed wind speed.

As can be appreciated from the embodiment of FIG. **12**, variable screens can be provided in architectural applications that change shape in response to ambient conditions and user/or wishes based on extremely simple mechanical actuation. Such screens can contribute to the creation of a materially-rich architectural environment, while still accommodating building performance and occupant needs. Optimal angles and opacities can be achieved to shade buildings and building openings to provide the passage of diffuse light while blocking direct light, or to allow visibility through the screen from selective angles. When fully closed, the screen can be made sufficiently strong to resist the damaging effects of hurricanes and major wind storms, to block sunlight, or to provide privacy. When fully open, the screen can allow the passage of natural light and breezes, and to provide views to the outdoors.

FIG. **13** illustrates the type of shading that a variable screen **170**, similar to the screens shown in FIGS. 1-6, can provide. As is shown in FIG. **13**, the slats **172** of the screen **170** have been deformed because of the application of a tensile force along the directions identified by arrow **174**. Although the application of the force causes openings **176** to form within the screen **170**, the slats **172** are angled so as to be generally perpendicular to incident light rays (identified by multiple dashed arrows) emitted by the sun **178**. Therefore, the screen **170** provides shade (identified by the shaded region) but simultaneously enables diffuse light and air to pass through the screen. The screen **170** therefore can be deformed not only to occlude or permit the passage of light and/or fluid, but also to produce optimal angles for the maximizing the interception of solar radiation of the surface of the screen.

In cases such as those described in relation to FIGS. **12** and **13** in which a screen is to receive a large amount of incident sunlight, the screen can be provided with photovoltaic elements to capture the light and convert it into electricity. FIG. **14** illustrates such an embodiment. In that figure, a variable screen **180** (shown in an open configuration) is provided with multiple photovoltaic cells **182** that are adapted to use light energy in the form of photons from the sun to generate electricity through the photovoltaic effect.

FIGS. **15A-15D** illustrate an example small-scale application for a variable screen. In particular, those figures show a screen **190** that is used in a window **192** of a home, office, or other structure. The screen **190** can be rolled up within a housing **194** provided at the top of the window **192**. As with the embodiment of FIG. **12**, a motor (not shown) can assist the user in rolling up the screen **190**. When the screen **190** is to be used, for example to block light or provide privacy, the screen can be extended downward, as depicted in FIG. **15A**, so that the entire window **192** is ultimately covered by the screen, as depicted in FIG. **15B**. In some embodiments, the screen **190**

can be extended downward using the motor within the housing **194** as well as a first track member **196** secured to the end of the screen that is driven downward along opposed tracks (not shown) along the sides of the window **192** by the motor. When the screen **190** has been fully extended as shown in FIG. **15B**, substantially all light is blocked and maximum shading is provided.

To adjust the screen **190** to let in more light, a second track member **198** can be driven downward along the opposed tracks, as depicted in FIG. **15C**, over the screen to a point along the length of the screen that is within the window space. The location of that point depends upon the ultimate orientation of the screen **190** that is desired (e.g., the degree to which the screen is to be opened). Once the appropriate point has been reached by the second track member **198**, the second track member can grip the screen **190** and then travel in the upward direction, as depicted in FIG. **15D**, to apply a tensile force to the screen that stretches the screen to open it up. Simultaneous to the upward travel of the second track member **198**, the motor within the housing **194** can roll up the unopened portion of the screen **190** above the second track member **198** into the housing. Because that portion of the screen is unopened, it is generally flat and can be more easily rolled up. Upward motion of the second track member **198** and operation of the housing motor can be halted once the desired screen orientation has been achieved, for instance when the second track member is adjacent the housing **194** as shown in FIG. **15D**.

FIGS. **16-18** illustrate a seventh embodiment of a variable screen **200**. As with the embodiments of FIGS. 1-11, the screen **200** comprises a generally flat sheet **202** of material that is defined at least in part by a first or front surface **204**, a second or back surface (not visible), opposed lateral edges **206** and **208**, a first or top edge **210**, and a second or bottom edge **212**. Also like the previously-described embodiments, the material used to construct the flat sheet **202** is a shape memory material that can be deformed in one or more directions in response to an applied force, and return to its original shape when the force is removed.

Unlike the previously described embodiments, however, the sheet **202** is formed from multiple independent strips **214** of material that are not connected to each other. The strips **214** are positioned edge-to-edge across the width of the sheet **202** and extend generally parallel to each other along a vertical direction of the sheet (in the orientation of FIGS. **16-18**) so as to form slits **215**. Because each strip **214** is independent of the other strips, each strip can be twisted about its longitudinal (e.g., vertical) axis, as is depicted in FIG. **17**, for example using one or more motors (not shown). When the strips **214** are individually twisted, the strips form openings **216** through which light or fluids may pass. By way of example, the openings **216** can be "diamond" shaped. As is shown in FIG. **17**, a given amount of twisting can result in a band **218** of openings **216** being formed across the lateral width of the screen **200** (in the orientation of FIG. **17**).

In some embodiments, further twisting of the strips **214** can result in the formation of multiple bands **220** of openings **216**. The screen **200** is similar to the other screens described in this disclosure given that a force is applied to the screen to open it and the screen automatically returns to its normal, closed orientation when the force is removed due to the use of shape memory materials.

The invention claimed is:

1. A variable screen comprising:

a generally flat sheet having a front surface and a back surface, the sheet comprising a plurality of elongated strips of textile material that are connected to each other

9

at discrete connection points along their lengths so as to define a plurality of elongated slits that extend through the sheet from the front surface to the back surface; and shape memory elements that extend along opposed edges of the strips in a longitudinal direction of the strips;

wherein the slits are adapted to open into passages through which light and fluid can pass when a tensile force is applied to the sheet in a direction generally perpendicular to the slits and automatically close when the tensile force is removed.

2. The variable screen of claim 1, wherein the textile material is a woven fabric.

3. The variable screen of claim 1, wherein the strips are connected to each other at the connection points with textile material that is sewn or glued to the edges of the strips.

4. The variable screen of claim 1, wherein the strips are sewn or glued to each other at the connection points.

5. The variable screen of claim 1, wherein the shape memory elements are rods of shape memory material.

6. The variable screen of claim 1, wherein the shape memory elements are disposed in elongated pockets formed along the edges of the strips.

7. The variable screen of claim 1, wherein the textile material is a ripstop nylon.

8. The variable screen of claim 1, wherein the slits are linear and parallel to each other and perpendicular to opposed edges of the sheet.

9. The variable screen of claim 1, wherein the slits are arranged in rows and columns, and wherein the rows partially

10

overlap each other so that the slits are arranged in a staggered configuration across the sheet.

10. The variable screen of claim 1, wherein the shape memory elements are fiberglass battens.

11. A variable screening system comprising:

a variable screen comprising a generally flat sheet having a front surface, a back surface, the sheet being made of elongated strips of textile material that are connected together at discrete connection points along their lengths and being reinforced with shape memory elements, the strips defining elongated slits that extend through the sheet;

a housing adapted to receive the screen; and

a motor adapted to roll up the screen into the housing and to apply a tensile force to the variable screen in a direction generally perpendicular to the slits, the force causing the slits to open into passages through which light and fluid can pass;

wherein the passages of the screen automatically close when the tensile force is removed.

12. The system of claim 11, wherein the slits are arranged in rows and columns, and wherein the columns partially overlap each other so that the slits are arranged in a staggered configuration across the sheet.

13. The system of claim 11, further comprising a light sensor that senses incident sunlight and wherein the motor is automatically operated responsive to light sensed by the light sensor.

* * * * *